


Dimensiones para Cuerdas de Arco Recurvo (antes de darle vueltas)

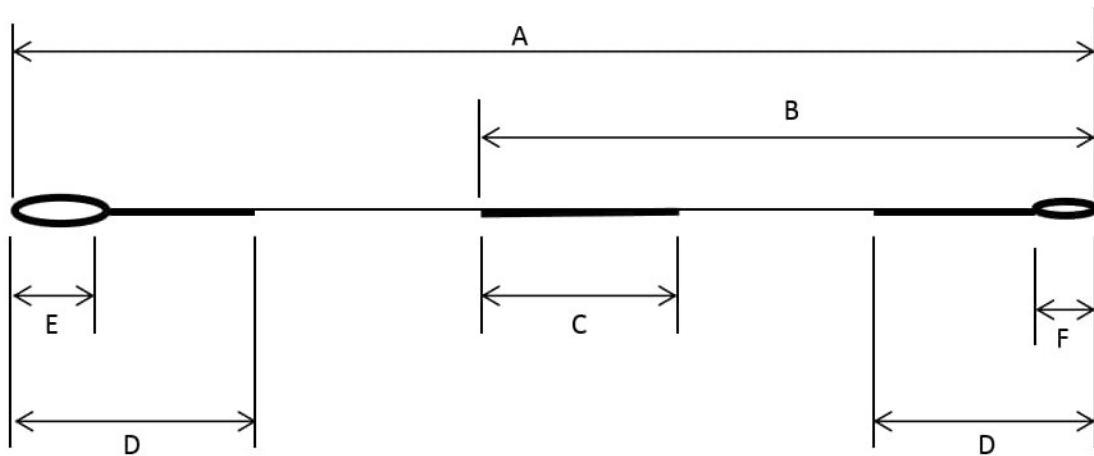

Long. AMO	A (1)	B (2)	C	D (3)	E	F
60"	56,5" (143,51 cm)	32 (81,28 cm)	6" (15,24 cm)	6" (15,24 cm)	1,75" (4,44 cm)	1,25" (3,17 cm)
62"	58,5" (148,59 cm)	33 (83,82 cm)	6" (15,24 cm)	6" (15,24 cm)	1,75" (4,44 cm)	1,25" (3,17 cm)
64"	60,5" (153,67 cm)	34 (86,36 cm)	6" (15,24 cm)	6" (15,24 cm)	1,75" (4,44 cm)	1,25" (3,17 cm)
66"	62,5" (158,75 cm)	35 (88,90 cm)	6" (15,24 cm)	6" (15,24 cm)	1,75" (4,44 cm)	1,25" (3,17 cm)
68"	64,5" (163,83 cm)	36 (91,44)	6" (15,24 cm)	6" (15,24 cm)	1,75" (4,44 cm)	1,25" (3,17 cm)
70"	66,5" (168,91 cm)	37 (93,98)	6" (15,24 cm)	6" (15,24 cm)	1,75" (4,44 cm)	1,25" (3,17 cm)
72"	68,5" (174 cm)	38 (96,52)	6" (15,24 cm)	6" (15,24 cm)	1,75" (4,44 cm)	1,25" (3,17 cm)

1. Añadir 0,75" para arcos Hoyt Formula o cuerpo W&W CXT. Añadir 2" para palas Border HEX 5 o HEX 6.
2. Añadir 0.375" para arcos Hoyt Formula o palas W&W CXT. Añadir 1" para palas Border HEX 5 o HEX 6.
3. Añadir 1" para palas Border HEX 5 o HEX 6.